

CHAIN

CHAIN

GRADE 30 PROOF COIL



NOT TO BE USED FOR OVERHEAD LIFTING.

- Carbon Steel.
- Standard container—fiber drum.
- Finish—Self colored and Galvanized.
- Proof loaded at 2 times Working Load Limit.
- Minimum Ultimate load 4 times Working Load Limit.

Chain Size (in.)	Working Load Limit (lbs.)
3/16	800
1/4	1300
5/16	1900
3/8	2650
1/2	4500
5/8	6900
3/4	10600




NOT TO BE USED FOR OVERHEAD LIFTING.

GRADE 40 HIGH TEST

- Carbon Steel.
- Standard container—fiber drum.
- Finish—Self colored.
- Proof loaded at 2 times Working Load Limit.
- Minimum Ultimate load 3 times Working Load Limit.

Chain Size (in.)	Working Load Limit (lbs.)
1/4	2600
5/16	3900
3/8	5400
7/16	7200
1/2	9200
5/8	13000
3/4	20200

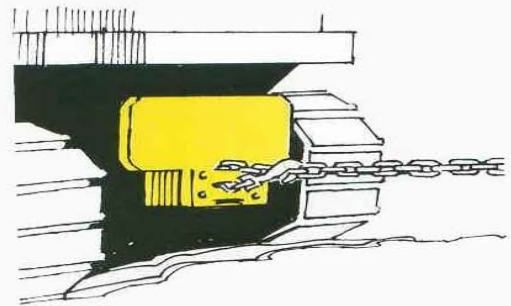

WARNING

To prevent the possibility of serious bodily injury:


- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

CHAIN

GRADE 70 - TRANSPORT

NOT TO BE USED FOR OVERHEAD LIFTING.

- High Tensile Carbon Steel.
- Standard container—fiber drum.
- Finish—Self colored.
- Proof loaded at 2 times Working Load Limit.
- Minimum Ultimate load 4 times Working Load Limit.

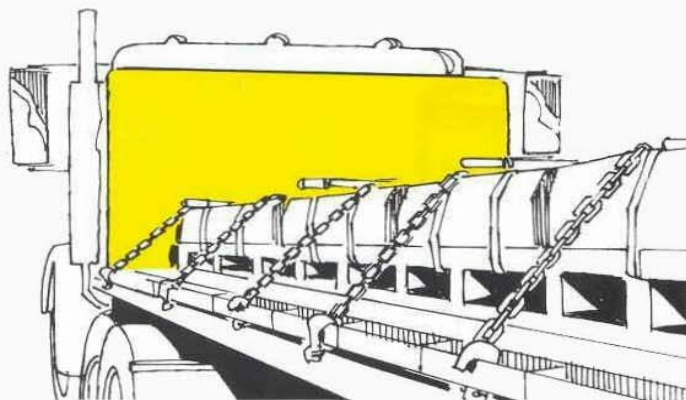


Chain Size (in.)	Working Load Limit (lbs.)
1/4	3150
5/16	4700
3/8	6600
7/16	8750
1/2	11300



GRADE 80—ALLOY

ALLOY CHAIN recommended for overhead lifting applications.

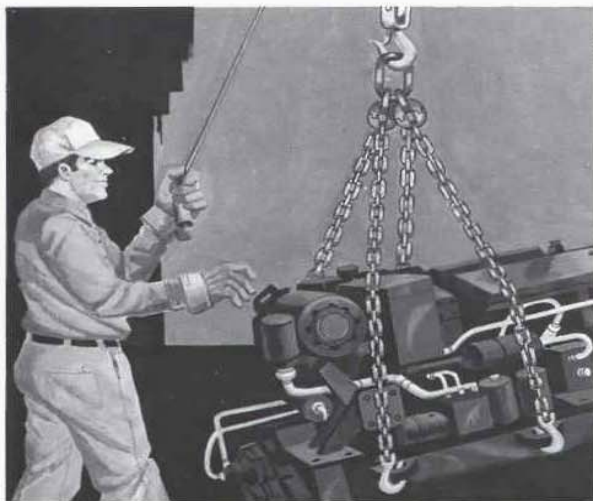

- Alloy Steel.
- Heat Treated.
- Finish—Self colored.
- Proof loaded at 2 times Working Load Limit.
- Minimum Ultimate load 4 times Working Load Limit.

Chain Size (in.)	Working Load Limit (lbs.)
5/32 (1/4)	3500
5/16	4500
3/8	7100
1/2	12000
5/8	18100
3/4	28300
7/8	34200

⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.