
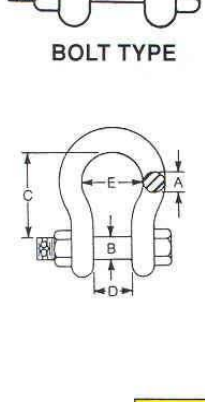


SHACKLES



ANCHOR STYLE

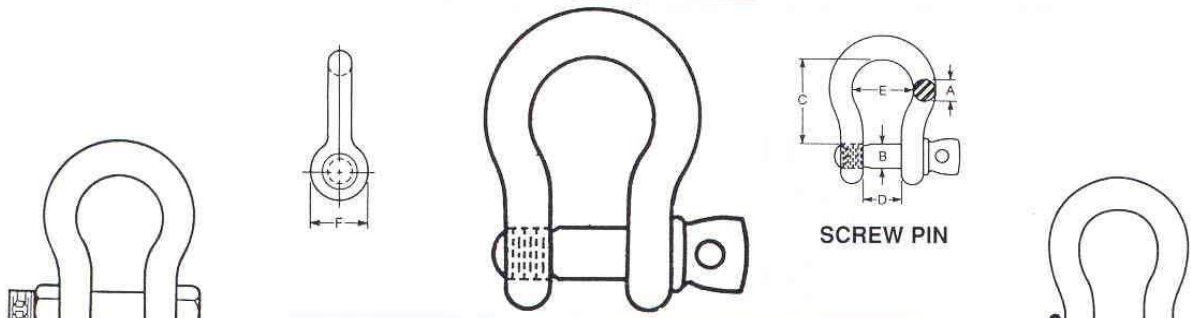

Nominal Shackle Size (in.) A	Working Load Limits * (tons)	Pin Dia. B	Dimensions (in.)			
			C	D	E	F
3/16	1/4	1/4	7/8	3/8	19/32	9/16
1/4	1/2	5/16	1-1/8	15/32	25/32	11/16
5/16	3/4	3/8	1-1/4	17/32	27/32	3/4
3/8	1	7/16	1-7/16	21/32	31/32	15/16
7/16	1-1/2	1/2	1-3/4	23/32	1-5/32	1-1/8
1/2	2	5/8	1-15/16	13/16	1-1/4	1-1/4
5/8	3-1/4	3/4	2-7/16	1-1/6	1-9/16	1-7/16
3/4	4-3/4	7/8	2-13/16	1-1/4	1-13/16	1-3/4
7/8	6-1/2	1	3-1/8	1-7/16	2-1/16	2
1	8-1/2	1-1/8	3-3/4	1-11/16	2-1/2	2-3/8
1-1/8	9-1/2	1-1/4	4-1/4	1-13/16	2-15/16	2-5/8
1-1/4	12	1-3/8	4-1/2	2	3-1/4	3
1-3/8	13-1/2	1-1/2	5-1/4	2-1/4	3-1/2	3-1/4
1-1/2	17	1-5/8	5-3/4	2-3/8	3-7/8	3-1/2
1-5/8	20	1-3/4	6-1/4	2-5/8	4-1/4	3-5/8
1-3/4	25	2	7	2-7/8	4-3/4	4
2	35	2-1/4	7-3/4	3-1/4	5-3/4	5
2-1/4	40	2-1/2	9-1/4	3-3/4	6	4-7/8
2-1/2	55	2-3/4	10-9/16	4-1/8	7-1/4	5-1/2
2-3/4	60	3	11-1/2	4-1/2	7-1/2	6
3	75	3-1/4	13-1/8	5	8	6-1/2
3-1/2	100	3-3/4	15	5-3/4	9-1/2	7-3/8

* Furnished in screw pin only.
* NOTE: Maximum Proof Load is 2.2 times the Working Load Limit. Minimum Ultimate Strength is 6 times the WLL.

CHAIN STYLE

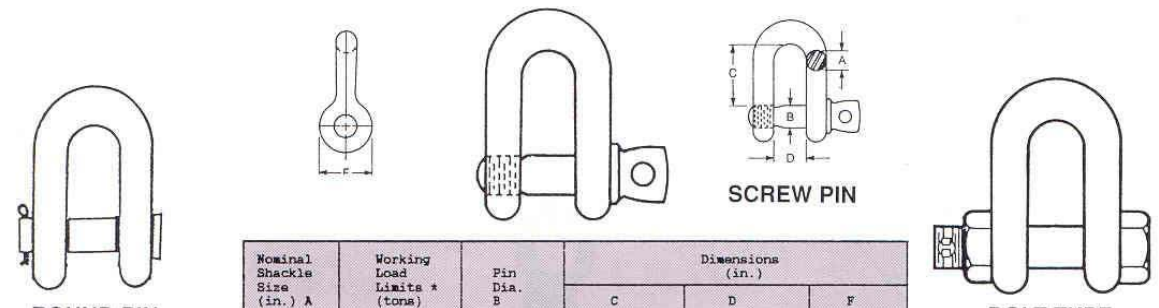

Nominal Shackle Size (in.) A	Working Load Limits * (tons)	Pin Dia. B	Dimensions (in.)		
			C	D	F
1/4	1/2	5/16	7/8	15/32	11/16
5/16	3/4	3/8	1	17/32	13/16
3/8	1	7/16	1-1/4	21/32	15/16
7/16	1-1/2	1/2	1-1/2	23/32	1-1/8
1/2	2	5/8	1-11/16	13/16	1-1/4
5/8	3-1/4	3/4	2	1-1/16	1-7/16
3/4	4-3/4	7/8	2-5/16	1-1/4	1-3/4
7/8	6-1/2	1	2-7/8	1-7/16	2
1	8-1/2	1-1/8	3-1/4	1-11/16	2-3/8
1-1/8	9-1/2	1-1/4	3-1/2	1-13/16	2-3/4
1-1/4	12	1-3/8	3-7/8	2	3
1-3/8	13-1/2	1-1/2	4-1/2	2-1/4	3-1/8
1-1/2	17	1-5/8	5	2-3/8	3-1/2
1-5/8	20	1-3/4	5	2-5/8	3-5/8
1-3/4	25	2	5-7/8	2-7/8	4
2	35	2-1/4	6-3/4	3-1/4	4-7/8
2-1/4	40	2-1/2	7	3-3/4	5
2-1/2	55	2-3/4	8-1/16	4-1/8	5-1/2
2-3/4	60	3	8-9/16	4-1/2	6
3	75	3-1/4	9-1/16	5	6-1/2
3-1/2	100	3-3/4	10-1/2	5-3/4	7-3/8

* NOTE: Maximum Proof Load is 2.2 times the Working Load Limit. Minimum Ultimate Strength is 6 times WLL.