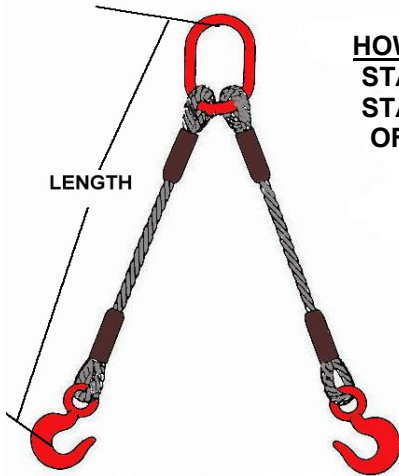





WIRE ROPE SPREADER ASSEMBLIES

TWO-LEG SPREADER ASSEMBLY

VWR-202 SINGLE ROPE LEGS
OBLONG LINK, EYE HOIST HOOKS,
FLEMISHED LOOPS, WITHOUT THIMBLES
TOP AND BOTTOM



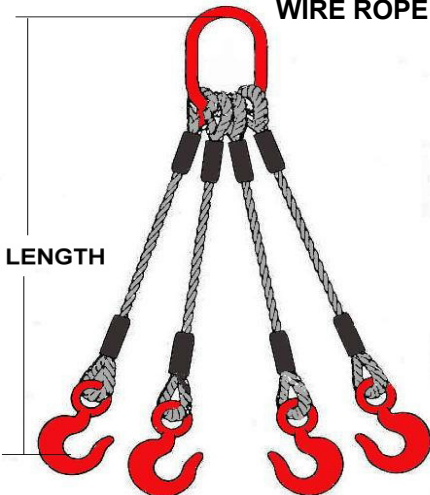
HOW TO ORDER:
STATE STYLE: VWR202
STATE: SIZE & LENGTH
OF WIRE ROPE

WIRE ROPE DIA	RATED CAPACITY ** HORIZONTAL ANGLES		
	 60°	 45°	 30°
1/4"	1.1T	.91T	.65T
5/16"	1.7T	1.4T	1T
8"	5T	0T	4T
7/16"	3.4T	2.7T	1.9T
2"	4T	6T	5T
5/8"	6.8T	5.5T	3.9T
3/4"	9.7T	7.9T	5.6T
7/8"	13T	11T	7.6T
	17T	14T	9.8T
1 1/8"	21T	17T	12T
1 1/4"	26T	21T	15T
1 3/8"	31T	25T	18T
1 1/2"	37T	30T	21T
1 3/4"	49T	40T	28T
2"	63T	52T	37T




** RATED CAPACITIES OF BASKET HITCHES ARE BASED ON MINIMUM DIAMETER OF CURVATURE AT THE POINT OF LOAD CONTACT OF 20 TIMES THE ROPE DIAMETER

FOUR-LEG SPREADER ASSEMBLY

VWR-404 SINGLE ROPE LEGS
OBLONG LINK, EYE HOIST HOOKS,
FLEMISHED LOOPS, WITHOUT THIMBLES
TOP AND BOTTOM



HOW TO ORDER:
STATE STYLE: VWR-404
STATE: SIZE & LENGTH OF
WIRE ROPE.

WIRE ROPE DIA	RATED CAPACITY ** HORIZONTAL ANGLES		
	 60°	 45°	 30°
1/4"	2.2T	1.8T	1.3T
5/16"	3.5T	2.8T	2T
7/8"		1T	.9T
7/16"	6.7T	5.5T	3.9T
1/2"	8.8T	7.1T	5.1T
5/8"	14T	11T	7.8T
3/4"	19T	16T	11T
7/8"	26T	21T	15T
1"	34T	28T	20T
1 1/8"	42T	34T	24T
1 1/4"	51T	42T	30T
1 3/8"	62T	50T	36T
1 1/2"	73T	60T	42T
1 3/4"	98T	80T	57T
	27T	04T	

BASED ON MINIMUM DIAMETER OF CURVATURE AT THE POINT OF LOAD CONTACT OF 20 TIMES THE ROPE DIAMETER

NOTE: OTHER SIZES AVAILABLE UPON REQUEST.

WARNING

To prevent the possibility of serious bodily injury:
* DO NOT EXCEED the working load limits

DO NOT EXCEED RATED CAPACITIES