


WIRE ROPE SLINGS

BRAIDED SLINGS

VWR-103-BR

8-part braided sling with braided loops and sleeves

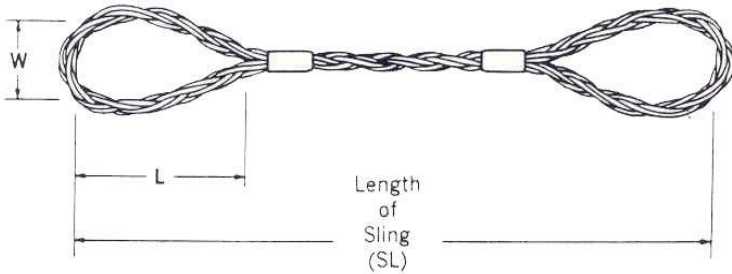

DIA OF INDIV ROPES****	RATED CAPACITIES**				
	CHOKER HITCH***	SINGLE LEG VERTICAL	BASKET HITCHES		
60°			45°	30°	
INCHES					
3/32	0.44	0.59	0.59	0.83	1
1/8	0.82	1.1	1.1	1.5	1.9
3/16	1.8	2.4	2.4	3.3	4.1
1/4	2.9	3.9	3.9	5.5	6.8
5/16	4.4	5.9	5.9	8.3	10
3/8	6.3	8.4	8.4	12	14
7/16	9.8	13	13	18	23
1/2	13	17	17	24	29
9/16	16	21	21	30	37
5/8	20	26	26	37	46

** Rated capacities are given in tons of 2,000 lbs using EIPS rope with IWRC. Rated capacities of basket hitches are

based on minimum diameter of curvature at the point of load contact of 20 times the rope diameter.


***Rated capacities of choker hitches apply when the angle of choke is greater than 135 degrees.

****Larger sizes available upon request.

SLINGS W/ SLIDING CHOKER HOOK

DIA OF ROPE	RATED CAPACITY**	SPliced LOOPS		SLIDING CHOKER HOOKS	
		WIDTH (INCHES)	LENGTH (INCHES)	SIZE	NO. WEIGHT LBS
1/4	0.44	2	4	1/4-5/16	1
3/8	0.69	3	6	3/8	0.8
1/2	1.7	4	8	1/2	1.25
5/8	2.7	5	10	5/8	5.5
3/4	3.8	6	12	3/4	4.5
7/8	5.2	7	14	7/8-1.0	10
1	6.7	8	16	7/8-1.0	10
1 1/8	8.5	9	18	1 1/8-1 1/4	26
1 1/4	9.9	10	20	1 1/8-1 1/4	26
1 3/8	12	11	22	1 3/8-1 1/2	42
1 1/2	14	12	24	1 3/8-1 1/2	42

VWR-101-CH
Sling with single-rope leg.
Flemished loops
and choker hooks.

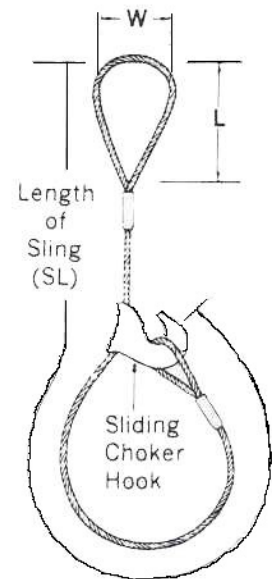

HOW TO ORDER:
STATE STYLE, SIZE, & LENGTH OF WIRE ROPE

**Rated capacities of choker hitches apply when the angle of choke is greater than 135 degrees.

⚠ WARNING

To prevent the possibility of serious bodily injury:
• DO NOT EXCEED the working load limits