


WIRE ROPE SOCKET ASSEMBLIES


VWR-202 SWS SWAGE SOCKET

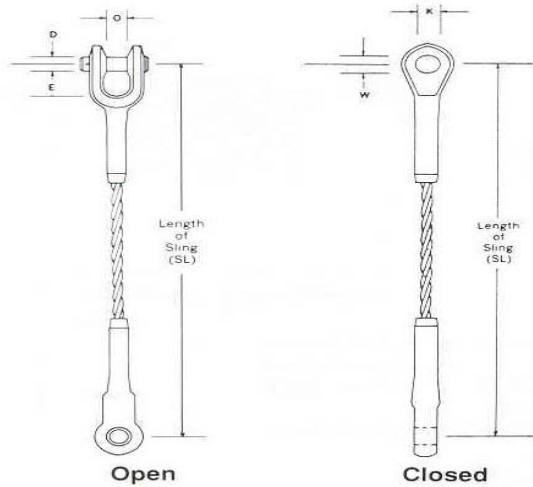

Diam of Rope	Open Swaged Socket			Closed Swaged Socket	
	O	D	E	K	W
in.	in.	in.	in.	in.	in.
1/4	1 1/16	1 1/16	1 5/32	1/2	3/4
3/8	1 3/16	1 3/16	1 11/32	1 1/16	7/8
1/2	1	1	1 1/2	3/8	1 1/16
5/8	1 1/4	1 3/16	1 21/32	1 1/8	1 1/4
3/4	1 1/2	1 3/8	2 1/16	1 9/16	1 7/16
7/8	1 3/4	1 9/8	2 7/16	1 1/2	1 11/16
1	2	2	2 3/4	1 3/4	2 1/16
1 1/8	2 1/4	2 1/4	3 1/8	2	2 9/16
1 1/4	2 1/2	2 1/2	3 1/2	2 1/4	2 9/16
1 3/8	2 1/2	2 1/2	4	2 1/4	2 9/16
1 1/2	3	2 3/4	4 3/8	2 1/2	2 11/16
1 3/4	3 1/2	3 1/2	5	3	3 9/16
2	4	3 3/4	6 1/8	3 1/4	3 11/16

Available open and/or closed with pins parallel or at right angles.

VWR-203 SPS SPELTER SOCKET

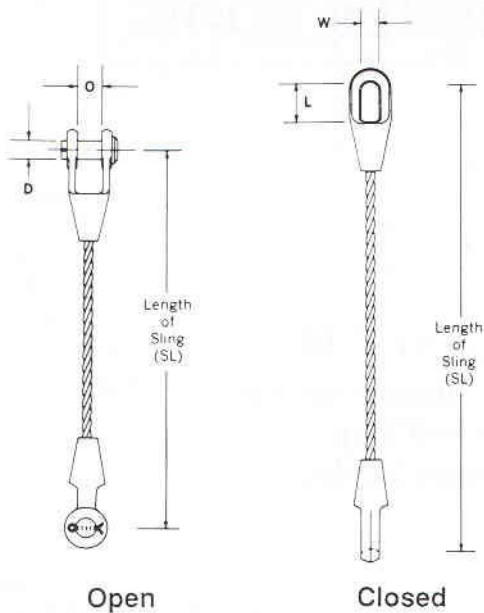

Diam of Rope	Open Sockets		Closed Sockets		
	O	D	W	L	K
in.	in.	in.	in.	in.	in.
3/8	1 3/16	1 3/16	1 1/16	2 1/16	5/8
1/2	1	1	1 1/2	2 5/16	7/8
5/8	1 1/4	1 3/16	1 3/8	2 3/16	1
3/4	1 1/2	1 3/8	1 5/8	3 1/16	1 1/4
7/8	1 3/4	1 5/8	1 7/8	3 9/16	1 1/2
1	2	2	2 1/4	4 1/16	1 3/4
1 1/8	2 1/4	2 1/4	2 1/2	4 9/16	2
1 1/4	2 1/2	2 1/2	2 3/4	5 1/8	2 1/4
1 3/8	2 1/2	2 1/2	2 3/4	5 1/8	2 1/4
1 1/2	3	2 3/4	3 1/8	6 1/8	2 1/2
1 5/8	3	3	3 1/4	6 1/2	2 3/4
1 3/4	3 1/2	3 1/2	3 7/32	7 1/16	3
2	4	3 3/4	3 29/32	8 1/16	3 1/4
2 1/4	4 1/2	4 1/4	4 9/32	9 3/4	3 5/8
2 1/2	5	4 3/4	5 3/8	11	4

Available open and/or closed with pins parallel or at right angles.

WARNING

To prevent the possibility of serious bodily injury:
 • DO NOT EXCEED the working load limits